

VB-060 250 psi



Disc-Type Spring-Loaded Vacuum Breaker

Description

The VB-060 is a normally closed full bore vacuum breaker which is designed to open fully to allow the intake of air into the pipeline or system when vacuum conditions occur, thus protecting the pipeline. Negative pressure (vacuum) conditions are caused by sudden shut-off of the pumps, pipe ruptures or the rapid draining of the pipeline. The VB-060 can be installed both on potable water lines and on wastewater lines.

Applications

- Pump stations.
- Water transmission lines.

Operation

The VB-060 valve is normally closed. The valve is designed to prevent vacuum conditions from occurring in pipelines and piping systems. After a power failure at the pump or a rapid draining of the pipeline, vacuum occurs. If the pressure differential across the orifice is greater than -0.29 psi, the disc will automatically start to open, allowing air into the pipeline to eliminate negative pressure. At -0.725 psi, the orifice will be fully open, allowing for maximum air intake. When the system returns to positive pressure, the disc will automatically close to tightly seal the valve.

The VB-060 Vacuum Breaker & Air/Vacuum, Automatic Air Release Valve operates similar to the VB-060 Vacuum Breaker with the addition of three other functions:

- 1- The air/vacuum component of the AV will discharge air, essential during pipe filling.
- 2- The vacuum breaker, installed at points where water column separation is anticipated, will open to intake air, then, close quickly to trap the air in the pipeline. The air/vacuum component of the air valve will slowly discharge this trapped air ahead of the returning water column. This will allow the air in the pipeline to act as a buffer against pressure surges and will also, by slowing down the air discharge, slow down the returning water column, prevent upsurges in the pipeline.
- 3- The air release component will release air continuously while the pipeline is operating under pressure, removing entrapped air from the line.

Installation

The VB-060 Disc-Type Spring-Loaded Vacuum Breaker should be installed on water transmission lines at the points where it is determined that vacuum or water column separation will occur.

Main Features

- Size Range: 8" – 24"
- Sealing at low pressure:
VB-060: 0.29 psi / VB-060 + AV: 2.9 psi
- Opening pressure:
VB-060: -0.29 psi / VB-060 + AV: -0.29 psi
- Maximum Working Pressure:
VB-060 8"-10", 14"-24" - 250 psi / VB-060 12" - 360 psi
- Testing Pressure:
VB-060 8"-10", 14"-24" - 360 psi / VB-060 12" - 580 psi
- The VB-060 series is available on both potable water and wastewater applications
- All internal parts made from non-corrosive materials
- Special orifice design, a combination of Stainless Steel and EDPM, assures long term maintenance-free operation
- The VB-060 is designed in accordance with the AWWA standard C512 and the European standard EN 1704-4
- Valve coating: fusion bonded epoxy in accordance with standard DIN 30677-2

Valve Selection

The VB-060 Vacuum Breaker & Air/Vacuum, Automatic Air Release Valve has the option of adding an air valve to the basic vacuum breaker valve. The type and size of the additional air valve will be dependent on application (water or wastewater) and valve size required.

Please see the table below for all the additional air valve options available.




VB-060 + D-070

Note

- For best suitability, it is recommended to send the fluid chemical properties along with the valve request.
- Upon ordering, please specify: model, size, working pressure, thread and flange standard and type of liquid.


Vacuum Breaker	Connection Diameter for Air Valve	Type of Air Valve Addition	Working Pressure (psi)	Orifice Area of Air Valve (Inch ²)	Remarks
8"	1", 2"	S-050 1"	250	0.0186	Nylon valve
		D-040 / C 1" / 2"	250	0.155 / 1.246	Nylon valve
		D-070 2"	150	3.038	Nylon valve
		D-060 2"	250	3.038	Metal
10" - 12"	1", 2", 3"	S-050 1"	250	0.0186	Nylon valve
		D-040 / C 1" / 2"	250	0.155 / 1.246	Nylon valve
		D-070 2"/3"	150	3.038	Nylon valve
		D-060 2"/3"	250	3.038	Metal
14" - 16"	1", 2", 3", 4"	S-050 1"	250	0.0186	Nylon valve
		D-070 2" / 3"	150/250	3.038 / 7.987	Nylon / Metal valve
		D-060 2" / 3"	250	3.038 / 7.796	Metal
		D-060 M1 3"	250	3.038	Metal
20" - 24"	1", 2", 3", 4"	D-070 2"/3"/4"	150/250	3.038 / 7.987 / 12.167	Nylon / Metal valve
		D-060 2"/3"/4"	250	3.038 / 7.796 / 12.167	Metal
		D-060 M1 3" / 4"	250	3.038 / 7.796	Metal

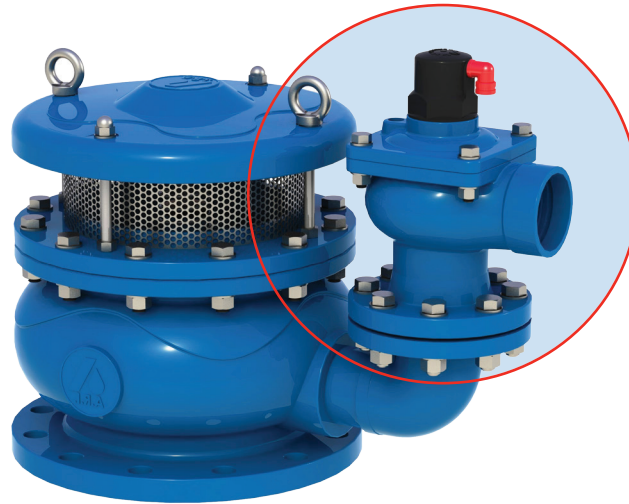

DIMENSIONS AND WEIGHTS For VB-060

Nominal Size	A Inch	B Inch	Weight Lb.
8"	13.5	16.5	141.0
10"	16.1	17.0	198.5
12"	19.1	20.9	286.6
14"	22.0	23.6	418.9
16"	25.0	27.2	529.1
20"	30.3	32.3	948.0
24"	36.2	41.1	1455.0

AIR INTAKE

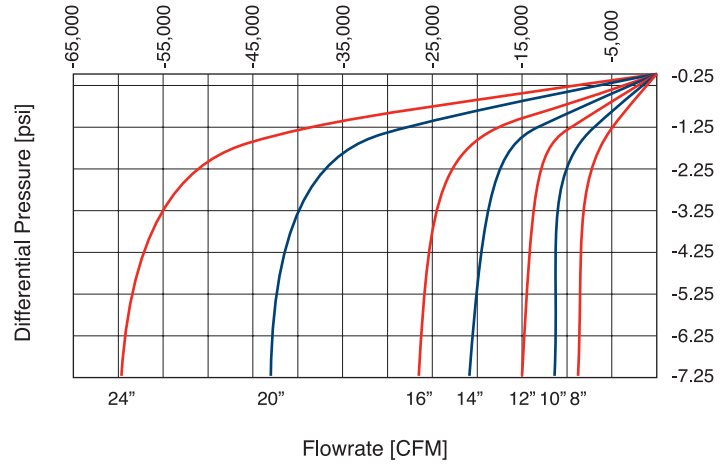

PARTS LIST AND SPECIFICATION

No	Part	Material
1.	Screen Cover	Ductile Iron ASTM A536 65 45 12
2.	Nut	Stainless Steel SAE 316
3.	Spring Lock	Stainless Steel SAE 316
4.	Spring	Stainless Steel SAE 316
5.	Guide Pin	Stainless Steel SAE 316
6.	Cover Bearing	Bronze
7.	Retainer	Stainless Steel SAE 316
8.	Disc	Ductile Iron ASTM A536 65 45 12
9.	Circlip	Stainless Steel SAE 316
10.	Domed Nut & Washer	Stainless Steel SAE 316
11.	Threaded Rod	Stainless Steel SAE 316
12.	Screen	Stainless Steel SAE 316
13.	Bolt, Nut & Washer	Stainless Steel SAE 316
14.	Cover	Ductile Iron ASTM A536 65 45 12
15.	O-Ring	E.P.D.M
16.	Body	Ductile Iron ASTM A536 65 45 12
17.	Rubber Seal	E.P.D.M
18.	Bolt	Stainless Steel 316 (24" - STST 302)

