

D-46 250 PSI



PRO Combination Air Valve for High Flow PAT.PEND

Description

The D-46 series High Flow Combination Air Valve has the features of both an air release valve and an air & vacuum valve.

The air release component is designed to automatically release small pockets of air to the atmosphere as they accumulate along a pipeline or piping system when it is full and operating under pressure.

The air & vacuum component is designed to automatically discharge or admit large volumes of air during the filling or draining of a pipeline or piping system. This air valve will open to relieve negative pressures whenever water column separation occurs.

Applications

- Pump stations: after the pump and after the check valve.
- Downstream (after) and upstream (before) of shut-off valves.
- After deep-well pumps.
- On long constant-sloped pipeline segments.
- At peaks along the pipeline and at peaks relative to hydraulic gradient.
- At end lines.
- Before water meters.
- On strainers and filters.

Operation

The air & vacuum component, with the large orifice, discharges air at high flow rates during the filling of the system and admits air into the system at high flow rates during its drainage and at water column separation.

High velocity air will not blow the float shut. Water will lift the float, which seals the valve.

At any time during system operation, should internal pressure of the system fall below atmospheric pressure, air will enter the system.

The smooth discharge of air reduces pressure surges and other destructive phenomena.

The intake of air in response to negative pressure protects the system from destructive vacuum conditions and prevents damage caused by water column separation. Air entry is essential to efficiently drain the system.

The air release component releases entrapped air in pressurized systems.

Without air valves, pockets of accumulated air may cause the following hydraulic disturbances:

- Restriction of effective flow due to a reduction of the flow area. In

extreme cases this will cause complete flow stoppage.

- Obstruction of efficient hydraulic transmission due to air flow disturbances.
- Acceleration of cavitation damages.
- Increase in pressure transients and surges.
- Internal corrosion of pipes, fittings and accessories.
- Dangerous high-energy bursts of compressed air.
- Inaccuracies in flow metering.

As the system fills and is pressurized, the combination air valve functions in the following stages:

1. Air in the pipeline is discharged by the air valve.
2. Liquid enters the air valve, lifting the complete float and seal assembly to its sealing position.
3. Entrapped air, which accumulates at peaks and along the system, rises to the top of the air valve, which in turn displaces the liquid in the air valve body.
4. The lower component of the float and seal assembly drops down unsealing the rolling seal, opening the air release orifice and releasing the accumulated air.
5. Liquid enters the air release valve, the lower component of the float and seal assembly rises, pushing the rolling seal to its sealing position.

When internal pressure falls below atmospheric pressure (negative pressure):

1. The complete float and seal assembly will drop down, immediately opening the air & vacuum and air release orifices.
2. Air will enter into the system.

Main Features

- Working pressure range: 1.45 - 250
- Testing pressure: 1.5 times the maximum working pressure of the air valve.
- Maximum working temperature: 140° F
- Maximum intermittent temperature: 194° F
- Reliable operation reduces water hammer incidents.
- Dynamic design allows for high capacity air discharge while preventing premature closure.
- All main flow cross-sections are equal or greater than the nominal port area.
- Lightweight, small dimensions, simple and reliable structure.
- Unique one-piece body lessens the chance of leaks and vandalism.
- The discharge outlet enables the connection of a vent pipe.
- All internal operating parts are made of specially selected, corrosion-resistant materials.

- Minimum down-time for maintenance:
- 2" - all operating parts are consolidated into one replaceable cartridge
- 3" - 4" - air release component can be maintained without dismantling the air valve
- The large size of the automatic air release orifice relative to the air valve body:
- Discharges air at high flow rates.
- Lessens the danger of its obstruction by debris.
- Enables the usage of the rolling seal, making it less sensitive to pressure differential than a direct float seal.

Valve Selection

- Size range: 2" - 4"
- These valves are manufactured with flanged ends to meet any requested standard
- Valve coating: Fusion bonded epoxy coating according to the standard DIN 30677-2

Options

- One-way models

The D-46 series air valve is available as:

D-46-V - With a one-way, out-only attachment, allows air discharge only, prevents air intake (all models).

D-46-I - With a vacuum breaker, in-only attachment, allows air intake only, not allowing air discharge

D-46 NS Non-Slam Addition

The addition of an adjustable non-slam disc converts the D-46 into a non-slam air valve. The NS addition can be easily assembled in the field on an existing D-46 or bought already assembled (D-46 NS).


Upon ordering, please specify: model, size, working pressure, threads standard and type of liquid.




D-46 NS Non-Slam Add-on Component Data Table for Variable Orifices

Nominal Size	Total NS area Sq.In	NS orifice Inch	Pressure Switching Point PSI	Flow at 5.8 PSI
2" (50mm)	0.121	0.39	0.03	35 CFM
3" (80mm)	0.274	0.59	0.06	72 CFM
4" (100mm)	0.49	0.78	0.04	223 CFM


AIR & VACUUM FLOW RATE

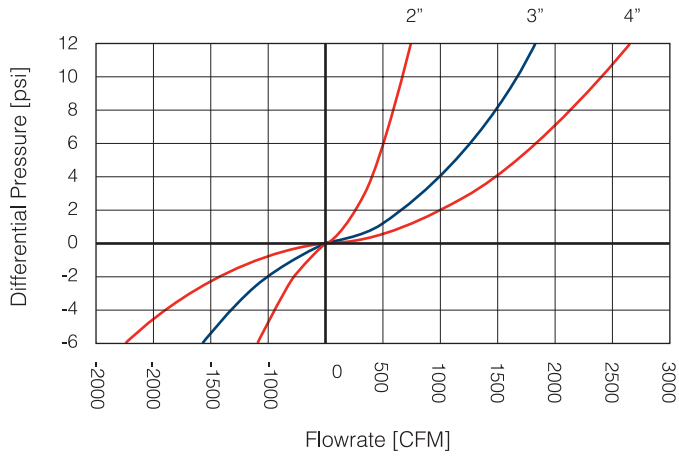

AIR RELEASE FLOWRATE

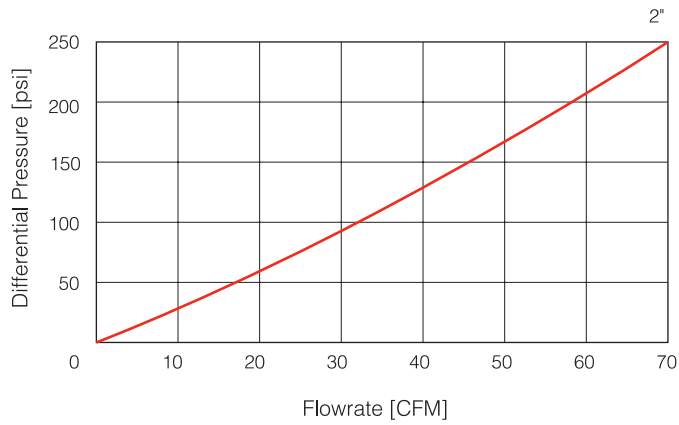


AIR RELEASE FLOWRATE

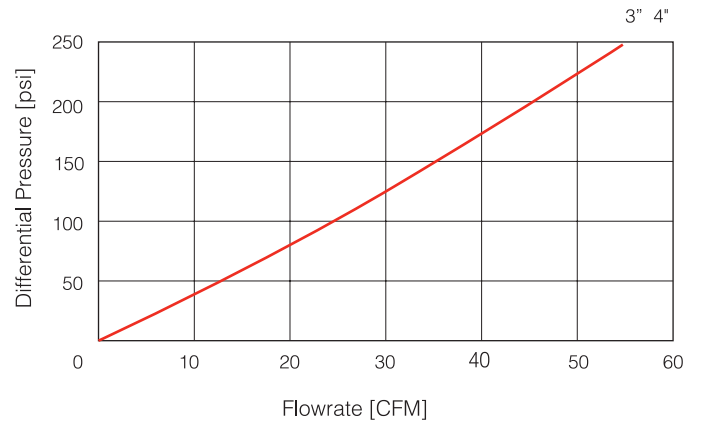


D-46 NS

AIR & VACUUM FLOWRATE

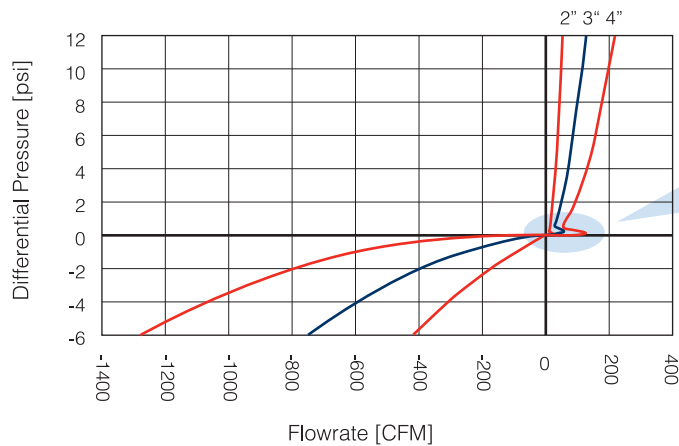

AIR DISCHARGE SWITCHING REGION

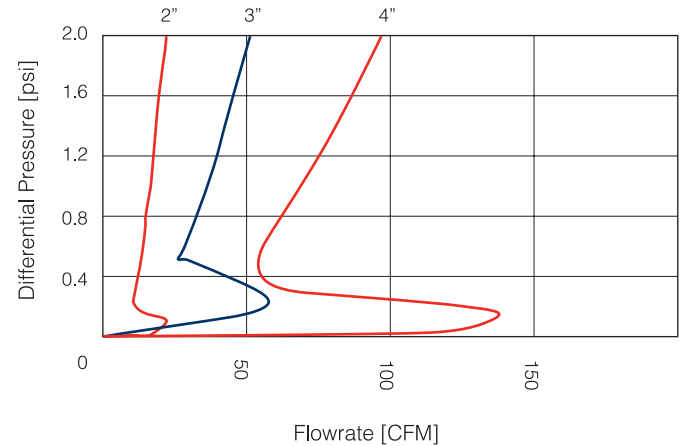

DIMENSIONS AND WEIGHT

Size	Dimensions mm		Connections C	Weight Lbs.		Orifice Area Sq.in	
	A	B		standard	NS Model	A / V	Auto.
2"	5.9	14.4	2" NPT Female	14.3	15.0	3.044	0.02
3"	7.6	18.5	3" NPT Female	31.0	33.0	7.791	0.02
4"	9.6	21.2	4" NPT Female	45.6	47.8	12.173	0.02

PARTS LIST AND SPECIFICATION

No.	Part	Material
1	Discharge Outlet	Polypropylene
2	Bolt	Stainless Steel SAE 316
3	Discharge Outlet Seal	EPDM
4	O-Ring	EPDM
5	NS Disc (Optional)	Nylon
6	Flap Shutter (Optional)	Nylon
7	Air & Vacuum Seal	EPDM
8	Body	Ductile Iron
9	Automatic Float Cover	Acetal
10	O-Ring	EPDM
11	Air & Vacuum Float	Nylon
12	Rolling Seal	EPDM
13	Automatic Float	Polypropylene
14	Pressure Release Outlet Plug	Reinforced Nylon
15	Float Lock	Acetal
16	Snap Ring	Nylon
17	One way out Drain outlet	Polypropylene

